

Move/2600

Ensure payments on the move, safely and fastly



- All payment methods accepted. Optimized for seamless contactless payment
- Terminals' functionality insured with with excellent connectivity and long-lasting battery
- Robust, affordable and functional device to meet merchants' daily needs
- Top-level security with PCI PTS V6 compliance and contactless EMV v3 certification



ingenco



The Move/2600, perfect for grab-and-go use.



Optimized checkout time

- Multiple alternative payment methods supported
- Highlighted contactless zone
- Large keypad and display

Compact yet powerful, designed to address in-store and on-the-move payment

Payment anywhere and anytime

- Wi-Fi and 4G with fallback to 2G and or 3G

Eco design to reduce carbon footprint and control the use of natural resources

- Use of components with low power consumption
- Use of renewable and recycled materials


Highest security

- PCI PTS v6
- Optional PCI compliant privacy shield
- Highest physical protection of sensitive data thanks to TETRA vault design

Optimized autonomy, to handle business all day long

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

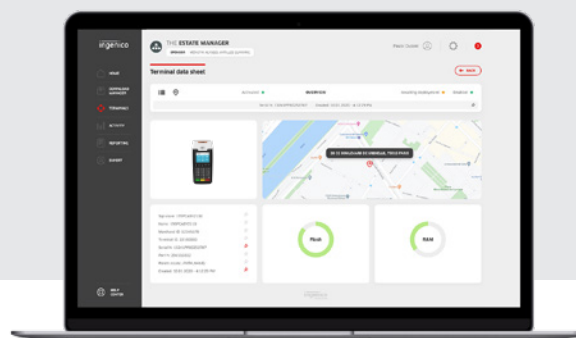

Processor	• Application & Crypto processor	• Cortex A7	✓
Memory	• Internal	• 256 MB Flash, 256 MB RAM • 512 MB Flash, 256 MB RAM	✓ Option
OS		• Telium TETRA	✓
SIM		• 2 SIM	Option
SAM		• 1 SAM • 2nd and 3rd SAM	✓ Option
Card Reader(s)	• Magnetic card reader • Smart Card • Contactless	• ISO 1/2/3, 500K reads lifespan • EMV L1, 500K reads lifespan • EMV Contactless L1 3.0 spec compliant	✓ ✓ ✓
Display	• Colour	• 2.4"backlit, TFT, 264k (320×240 pixels)	✓
Keypad	• Physical keys	• 15 keys, raised markings, backlit • 5 functional keys without backlight	✓ ✓
Audio	• Buzzer		✓
Thermal Printer	• Speed in lines/s • Paper roll cage	• up to 24 lines/s • 58mm width x 40mm	✓ ✓

Terminal Connectivity	• WAN • LAN	• 4G (fallback GPRS only) and/or 3G • WiFi	Option Option
Terminal Connections	• 1 USB • Power supply	• USB-C • via USB-C	✓ Option
Battery	• Li-ion	• 2200mAh	✓
Terminal Size	• Terminal full option without PINshield	• 167×76×56 mm (6.6×3×2.2")	✓
Terminal Weight	• Terminal and battery	• 295g (10.41oz)	✓
Environment	• Operating temperature • Storage temperature • Relative humidity	• 0 to +50°C (32°F to 122°F) • -20 to +55°C (-4°F to 131°F) • 85% HR at +40°C (104°F)	✓ ✓ ✓
Security	• PCI PTS • Privacy shield	• PCI PTS V6 compliant • PCI compliant (factory mounted)	✓ Option



www.ingenico.com

ingenico